
Two-part clamping ring





Material

Profile

Seal

1.0038 electrically galvanized 1.4301 stainless steel



Flanged sealing ring, leakage-free see p. 26–31

DN nominal width	Inner diameter A	Screw DIN912	Material thickness	Weight
80	86	M8 x 60	1,5	0,247
90	96	M8 x 60	1,5	0,254
100	106	M8 x 60	1,75	0,306
112	118	M8 x 60	1,75	0,320
120	126	M8 x 60	1,75	0,329
125	131	M8 x 60	1,75	0,335
140	146	M8 x 60	1,75	0,353
150	156	M8 x 60	1,75	0,364
160	166	M8 x 60	1,75	0,376
175	181	M8 x 60	1,75	0,393
180	186	M8 x 60	1,75	0,399
200	206	M8 x 60	1,75	0,423
224	230	M8 x 60	1,75	0,450
250	256	M8 x 60	1,75	0,481
280	286	M8 x 60	1,75	0,516
300	306	M8 x 60	1,75	0,539
315	321	M8 x 60	1,75	0,557
350	356	M8 x 60	1,75	0,597
355	361	M8 x 60	1,75	0,603
400	406	M8 x 60	1,75	0,656
450	456	M8 x 60	1,75	0,714
500	506	M8 x 60	1,75	0,772
550	556	M8 x 60	1,75	0,831
560	566	M8 x 60	1,75	0,842
600	606	M8 x 60	1,75	0,889
630	636	M8 x 60	1,75	0,924

Versions in steel 1.0038,

electrically galvanized stainless steel 1.4301


1 The two-part ESKATE clamping ring is regarded as an all-rounder and is the best-selling clamping ring. It can be used everywhere and is considered to be especially easy to assemble due to its special articulated latch technology even in places that are very inaccessible.

Thanks to its special yellow-galvanized lug, this clamping ring can be opened and closed quickly and easily without it being possible for the screw to get lost during assembly.

• Very short lead times due to all year round availability from stock. Custom and non-standard factory sizes available on request

Minimum order value: Net goods value of 40.00 euros. The prices do not include VAT, packaging and forwarding. All dimensions in mm. All weights in kg. Subject to errors and alterations.



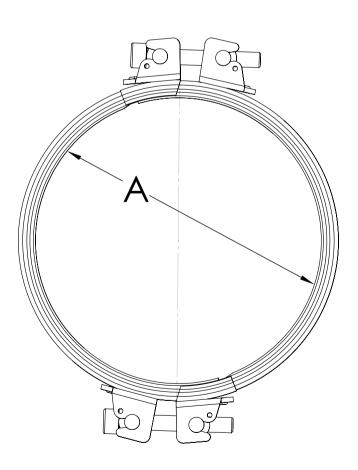

We would be pleased to advise you on your individual

terms and designs. Just give us a call. ⋈ info@eskate.de © +49 5734 66 66 6